


BRIDGESTONE



STMS **(L5S)**

SMOOTH TREAD-MS

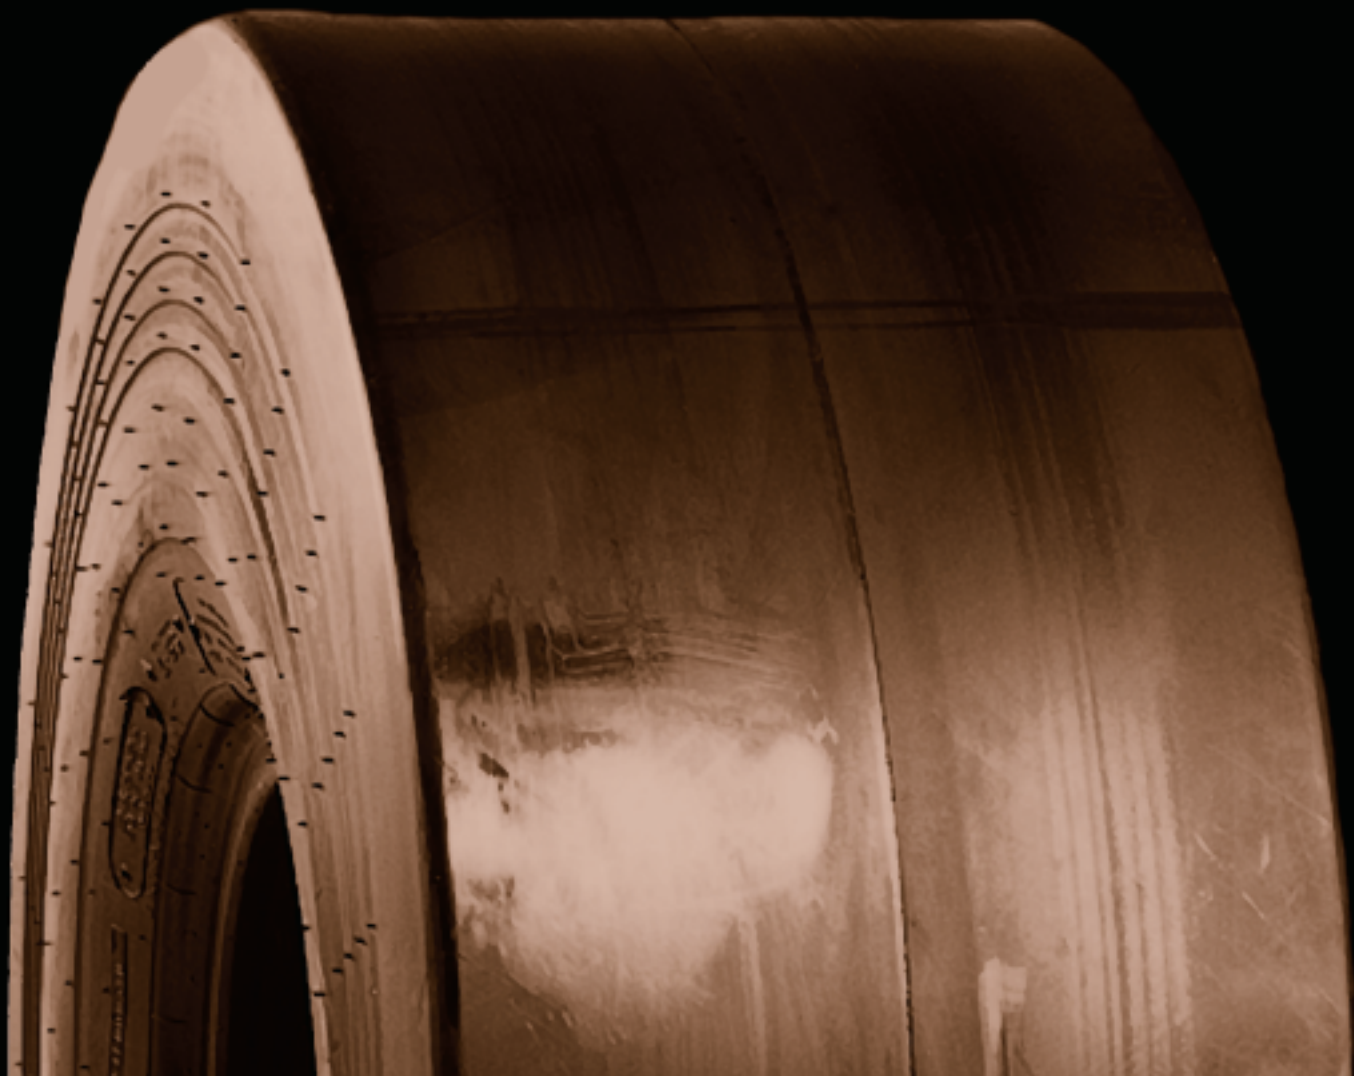

OFF-THE-ROAD TIRES



The SMOOTH TREAD-MS premium bias ply tire provides maximum cut resistance in severe quarry service, surface mining, and underground applications.

- ✓ *Smooth tread design*
- ✓ *Special compounding provides excellent tread life*
- ✓ *Exceptional cut and impact protection*

CATEGORY	TIRE SIZE	ARTICLE	PLY RATING	COMPOUND	TRA	AVERAGE WEIGHT	OTD (32ND)	RIM/ FLANGE	OVERALL DIAMETER (IN)	OVERALL WIDTH (IN)	STATIC LOAD RADIUS	STATIC LOADED WIDTH	MIN DUAL SPACING	REVS PER MILE
Small Tube Type	12.00-24+	181048	16	D2A	L5S	370	69	8.50V	50.2	12.6	23.9	13.3		408
	14.00-24+	181031	20	D2A	L5S	520	98	10.00W	54.1	14.4	25.4	15.4		381
Small Tubeless	16.00-25	261246	24	D2A	L5S	780	96	11.25/2.0	60.5	17.7	28.3	18.1		341
	17.5-25	426081	20	D2A	L5S	610	87	14.00/1.5	54.5	17.7	25.4	18.2		379
	18.00-25	261254	24	D2A	L5S	1,080	106	13.00/2.5	65.9	20.5	30.0	21.7		315
	18.00-25	420972	32	D2A	L5S	1,140	106	13.00/2.5	65.9	20.5	30.0	21.7		315
	18.00-25	424684	32	D2A UCR	L5S	1,160	106	13.00/2.5	65.9	20.5	30.0	21.7		315
	20.5-25	261270	16	D2A	L5S	920	97	17.00/2.0	61.3	21.6	28.9	22.7		335
	21.00-25	275565	32	D2A	L5S	1,520	114	15.00/3.0	70.8	22.6	32.2	24.1		294
Large Tubeless	26.5-25	275573	32	D2A	L5S	1,900	120	22.00/3.0	70.8	26.8	32.6	28.3		293
	26.5-25	421863	36	D2A	L5S	1,940	120	22.00/3.0	70.8	26.8	32.6	28.3		293
	29.5-29	419095	34	D2A	L5S	2,290	130	25.00/3.5	79.6	29.5	36.7	31.2		260
	35/65-33	424874	42	D2V	L5S	3,300	122	28.00/3.5	81.7	35.3	38.3	37.4		252
Giant Tubeless	45/65-45	422657	58	D2V	L5S	6,600	146	36.00/4.5	107.5	45.1	49.4	46.9		193

+ For use on Flat Base Rim.