


BRIDGESTONE



VSMS **(L5S)**

V-STEEL SMOOTH TREAD-MS

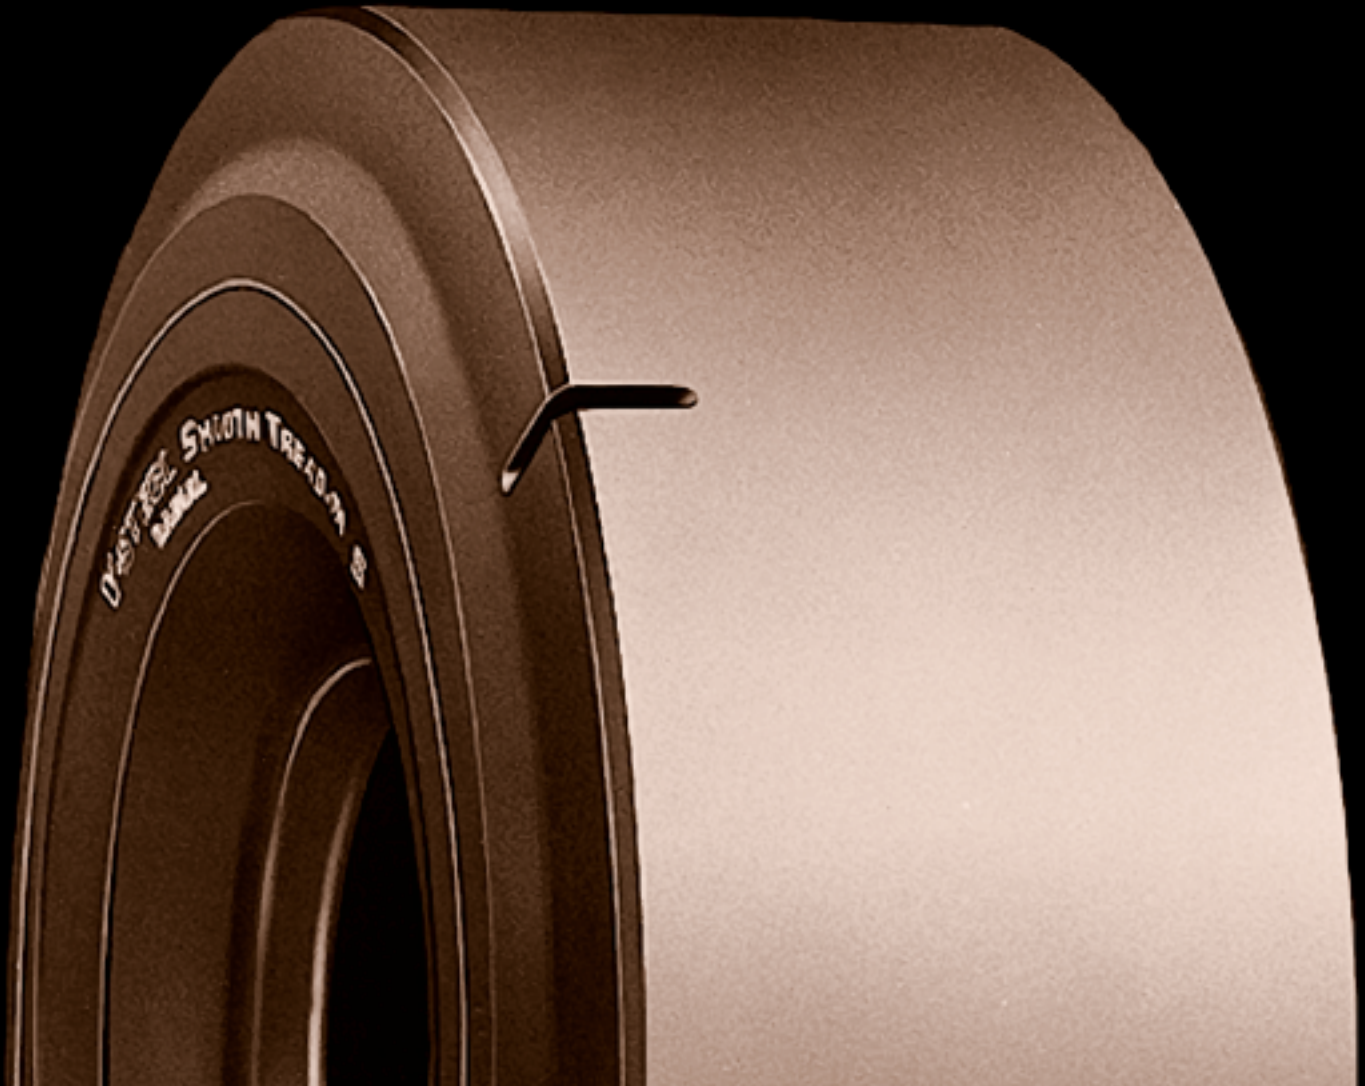

OFF-THE-ROAD TIRES



The V-STEEL SMOOTH TREAD-MS radial tire is ideal for underground mining, landfill, salvage and material handling operations requiring maximum cut resistance and long tread wear contributing to lower operating costs.

- ✓ *Maximum cut and wear resistance*
- ✓ *Extra-deep tread for severe conditions*
- ✓ *Extra heavy duty 1* and 2* radial casing design*

CATEGORY	TIRE SIZE	ARTICLE	PLY RATING	COMPOUND	TRA	AVERAGE WEIGHT	OTD (32ND)	RIM/ FLANGE	OVERALL DIAMETER (IN)	OVERALL WIDTH (IN)	STATIC LOAD RADIUS	STATIC LOADED WIDTH	MIN DUAL SPACING	REVS PER MILE
Small Tube Type	9.00R20	150908	2*	D2A	L5S	240	64	7.00T	41.5	10.2	18.7	11.9		506
	12.00R20	150916	2*	D2A	L5S	350	72	8.50V	46.2	12.3	21.3	13.8		455
	12.00R24	150924	2*	D2A	L5S	400	72	8.50V	50.2	12.4	22.6	14.3		418
Small Tubeless	17.5R25	422908	2*	D2A	L5S	650	86	14.00/1.5	54.1	17.3	24.5	19.2		388
	18.00R25	419397	1*	D2A	L5S	1,060	105	13.00/2.5	66.2	20.2	29.0	23.3		317
Large Tubeless	26.5R25	275980	1*	D2A	L5S	1,690	120	22.00/3.0	69.9	26.9	31.9	29.4		301
	26.5R25	422096	2*	D2V	L5S	1,700	120	22.00/3.0	69.9	26.9	31.9	29.4		301
	29.5R29	422134	2*	D2V	L5S	2,380	132	25.00/3.5	79.1	30.2	35.6	33.9		266